



特點:

本系列油泵，操作時噪音小，運轉滑順，耐摩擦，適于工作母機及專用機使用。

溫升小，馬力損失小，內藏式自動壓力補償設計。

FEATURES:

This series pump which being with low noise level, running smoothly and wear resistant. Especially, those are very suit-able for machine tool & special purpose m/c use.

Little temp upward & little power lose and designed of auto emersed pressure compensating.





訂購索引/ORDERING INDEX:

VP	-	*	-	F	A	*	-	*	
									泄油方式: Oil drainage mode
									無標記: 外泄油, N: 內泄油
									No mark: oil leakage, N: internal oil release
									連接方式: Connection type
									無標記: 軸徑12.7mm, DH:9齒花鍵,
									XH: 7齒花鍵, D: 軸徑15.875mm, B:扁軸;
									No mark: shaft diameter 12.7mm, DH: 9 tooth spline,
									XH: 7 tooth spline, D: shaft diameter 15.875mm, B: flat shaft;
									壓力範圍 Pressure range
									1:3-35bar, 2: 30-55bar, 3:50-70bar
									安裝方式 Mounting style
									F: Flange mounting (法蘭式)
									吐出能力 Delivery capacity at At 1800 rpm
									8L/min, 12L/min, 15L/min, 20L/min
									系列號碼 Serial no.

規格/SPECIFICATIONS:

型式 Model	吐出能力 Delivery capacity(1800rpm)	壓力調整範圍 Pressure adj. range	額定速度 Rated speed	
			最高 Max.	最低 Min.
VP-08	8 L/min	3 ~ 70bar	1800 rpm	800 rpm
VP-12	12 L/min	3 ~ 70bar		
VP-15	15 L/min	3 ~ 70bar		
VP-20	20 L/min	3 ~ 70bar		

尺寸圖/DIMENSIONS: VP-08、12、15、20

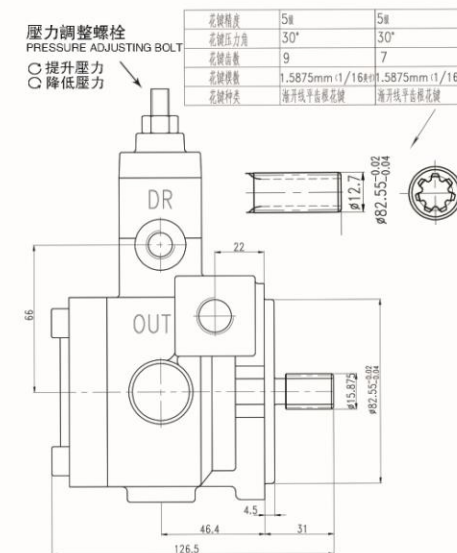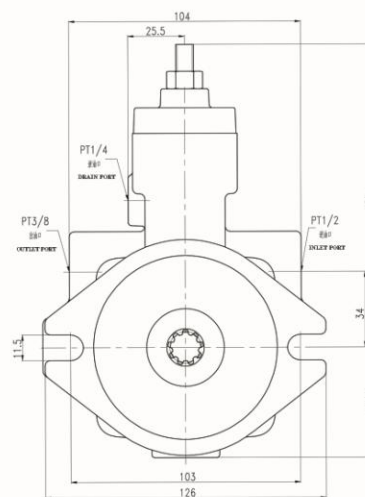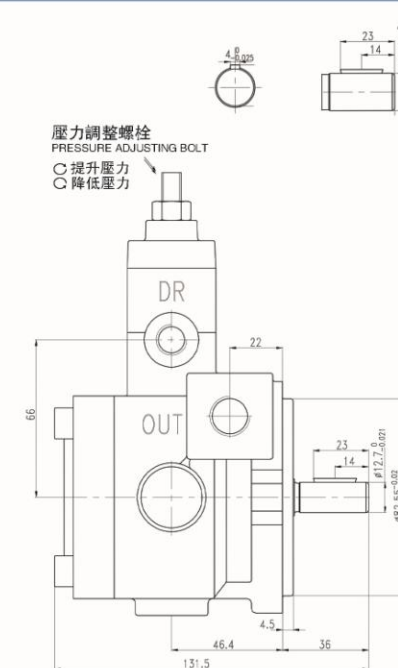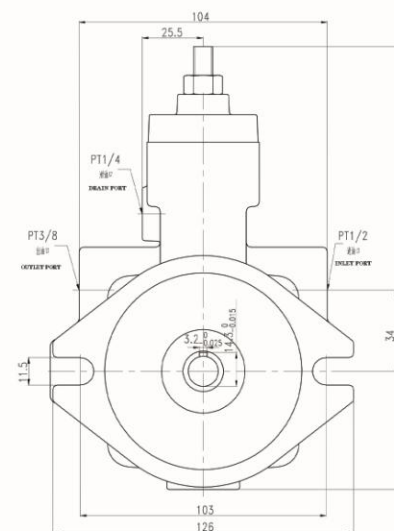



特點:

本系列泵浦，操作時噪音小，運轉滑順，耐摩耗，適于工作母機及專用機使用。


溫升小，馬力損失小，內藏式自動壓力補償設計。

FEATURES:

This series pump which being with low noise level, run smoothly and wear resistant. Especially, those are very suitable for machine tool & special purpose m/c use.

Little temp upward & little power loss and designed of auto emerged pressure compensating.



訂購索引/ORDERING INDEX:

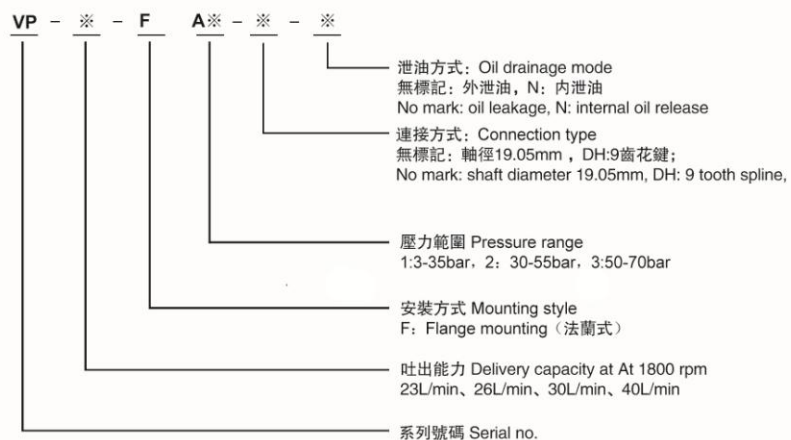


規格/SPECIFICATIONS:

型式 Model	吐出能力 Delivery capacity(1800rpm)	壓力調整範圍 Pressure adj. range	額定速度 Rated speed	
			最高 Max.	最低 Min.
VP-23	23 L/min	3 ~ 70bar	1800 rpm	800 rpm
VP-26	26 L/min	3 ~ 70bar		
VP-30	30 L/min	3 ~ 70bar		
VP-40	40 L/min	3 ~ 70bar		


尺寸圖/DIMENSIONS: VP-23、26、30、40

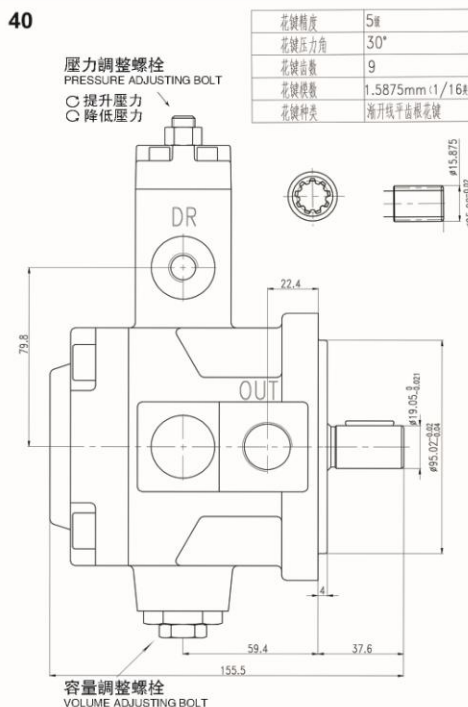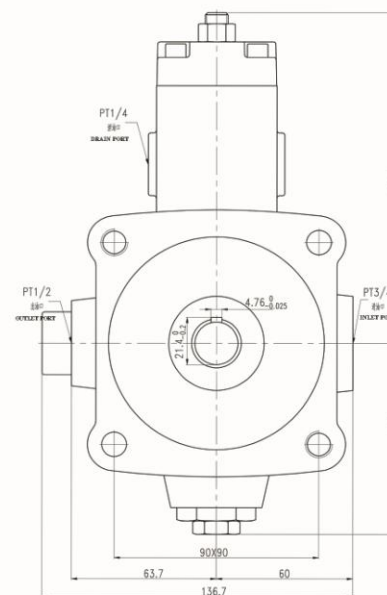

VP-30

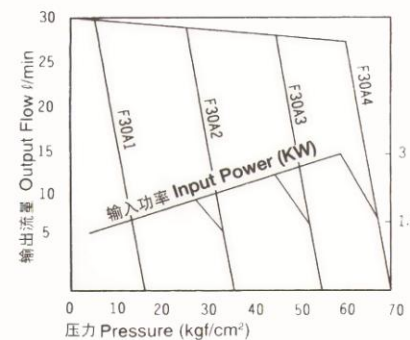

VP-40

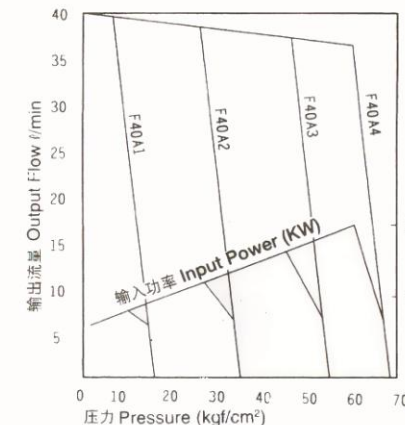





特點:

本系列泵浦，外觀新穎，操作時嘈音小，運轉滑順，耐摩耗，適于工作母機及專用機使用。


溫升小，馬力損失小，內藏式自動壓力補償設計。

FEATURES:

This series pump which being with novel appearance low noise level, running smoothly and wear resistant. Especially, those are very suitable for machine tool & special purpose m/c use.

Little temp upward & little power loss and designed of auto emerged pressure compensating.

訂購索引/ORDERING INDEX:

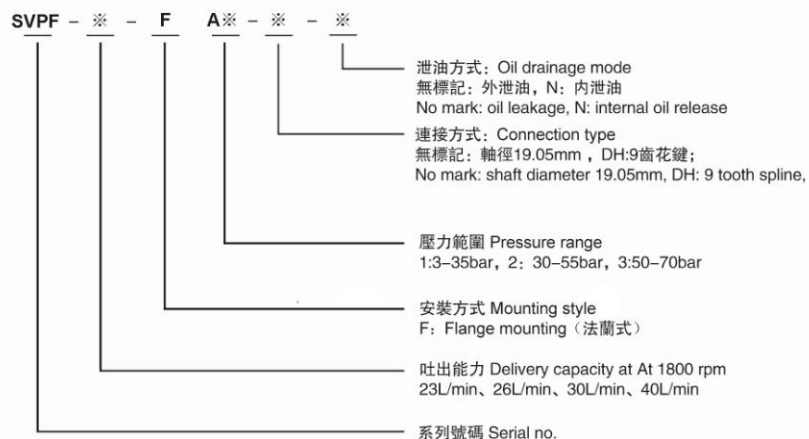

規格/SPECIFICATIONS:

型式 Model	吐出能力 Delivery capacity(1800rpm)	壓力調整範圍 Pressure adj. range	額定速度 Rated speed	
			最高 Max.	最低 Min.
SVPF-23	23 L/min	3 ~ 70bar	1800 rpm	800 rpm
SVPF-26	26 L/min	3 ~ 70bar		
SVPF-30	30 L/min	3 ~ 70bar		
SVPF-40	40 L/min	3 ~ 70bar		



特點:

本系列油泵，操作時嘈音小，運轉滑順，耐摩耗，適于工作母機及專用機使用。

內藏式自動壓力補償設計，性能優越，溫升低，更節能。

FEATURES:

This series pump which being with low noise level, running smoothly and wear resistant. Especially, those are very suitable for machine tool & special purpose m/c use.

Designed of emerged pressure compensating, excellent performance, small temperature rise, much more energy saving.


訂購索引/ORDERING INDEX:




規格/SPECIFICATIONS:

型式 Model	吐出能力 Delivery capacity(1800rpm)	壓力調整範圍 Pressure adj. range	額定速度 Rated speed	
			最高 Max.	最低 Min.
VDP-15	15 L/min	3 ~ 80bar	1800 rpm	800 rpm
VDP-30	30 L/min	3 ~ 80bar		


尺寸圖/DIMENSIONS: VDP-15、30

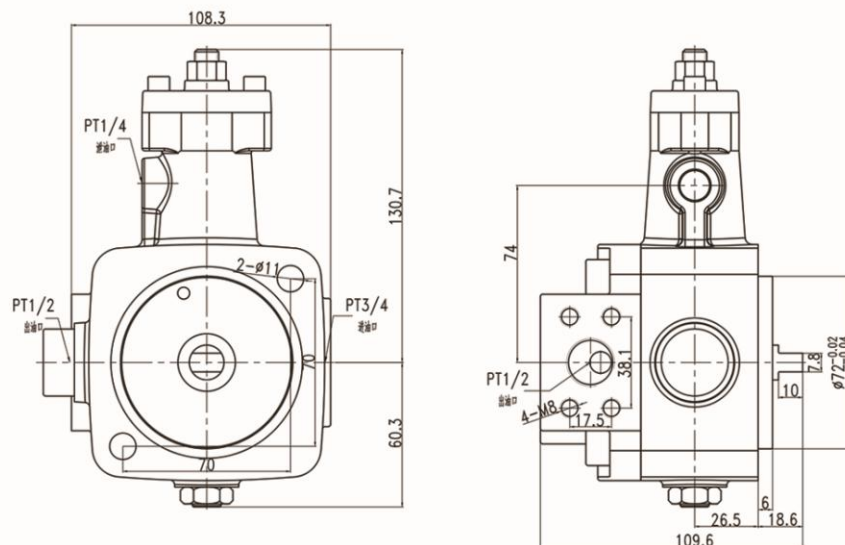

尺寸圖/DIMENSIONS: NVP-23、26、30、40

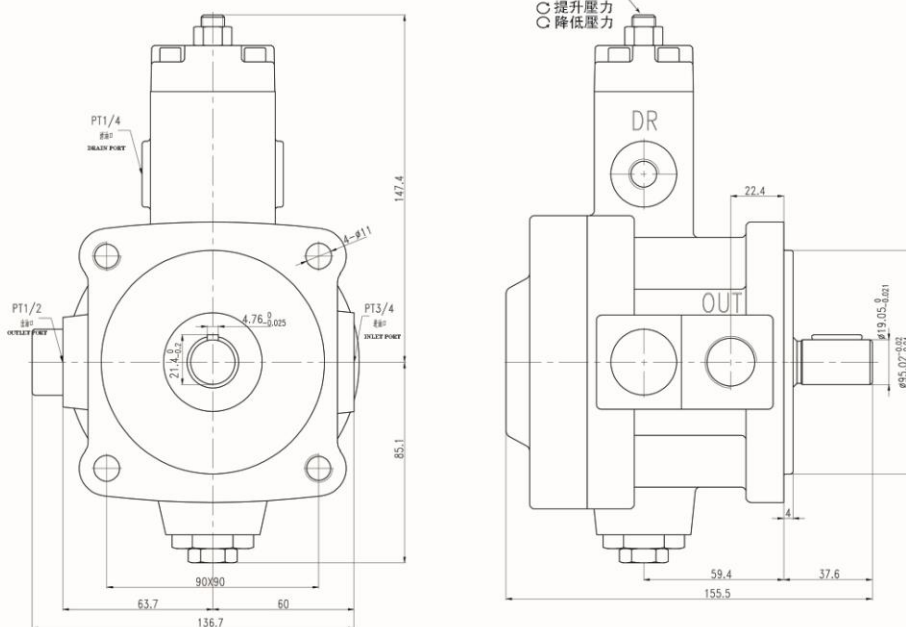

壓力調整螺栓
PRESSURE ADJUSTING BOLT
○ 提升壓力
○ 降低壓力

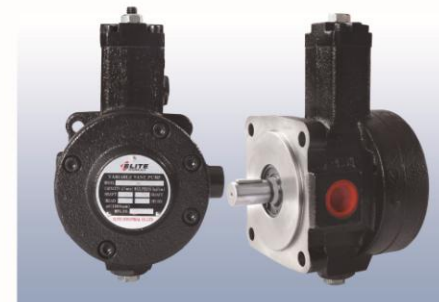

特點:


本系列泵浦，外觀新穎，操作時噪音小，運轉滑順，耐摩耗，適于工作母機及專用機使用。
溫升小，馬力損失小，內藏式自動壓力補償設計。

FEATURES:

This series pump which being with novel appearance low noise level, running smoothly and wear resistant. Especially, these are very suitable for machine tool & special purpose m/c use.

Little temp upward & little power lose and designed of auto emerged pressure compensating.

訂購索引/ORDERING INDEX:

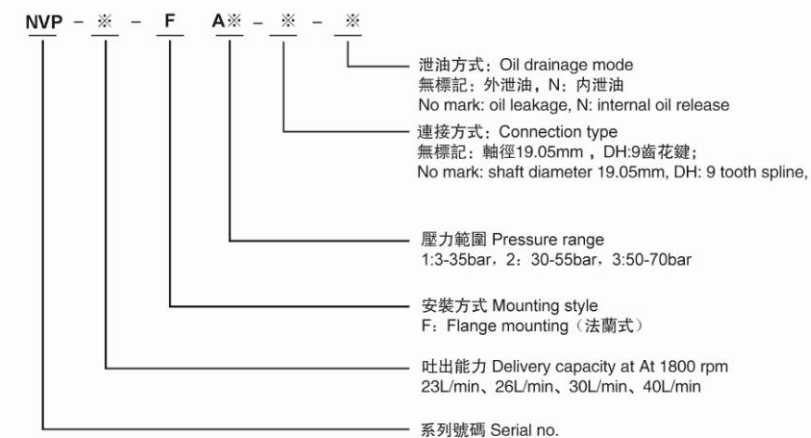

規格/SPECIFICATIONS:

型式 Model	吐出能力 Delivery capacity(1800rpm)	壓力調整範圍 Pressure adj. range	額定速度 Rated speed	
			最高 Max.	最低 Min.
NVP-23	23 L/min	3 ~ 70bar	1800 rpm	800 rpm
NVP-26	26 L/min	3 ~ 70bar		
NVP-30	30 L/min	3 ~ 70bar		
NVP-40	40 L/min	3 ~ 70bar		



訂購索引/ORDERING INDEX:


VP - ※ - ※ - F	A※ - A※ - ※ - ※	
		泄油方式: Oil drainage mode 無標記: 外泄油, N: 內泄油 No mark: oil leakage, N: internal oil release
		連接方式: 無標記: 軸徑15.875mm或19.5mm, DH:9齒花鍵, XH: 7齒花鍵; The axial diameter was 15.875mm or 19.5mm, DH: 9 tooth Key, XH: 7tooth spline;
		壓力範圍Pressure range(蓋端Cover end) 1:3-35bar, 2: 30-55bar, 3:50-70bar
		壓力範圍Pressure range(軸端Shaft end) 1:3-35bar, 2: 30-55bar, 3:50-70bar
		安裝方式Mounting style F: Flange mounting (法蘭式)
		吐出能力Delivery capacity(蓋端Cover end) 1:8 (23) L/min, 2:12 (26) L/min, 3:15 (30) L/min, 4: 20 (40) L/min
		吐出能力Delivery capacity(軸端Shaft end) 1:8 (23) L/min, 2:12 (26) L/min, 3:15 (30) L/min, 4:20 (40) L/min
		系列號碼Serial no.

規格/SPECIFICATIONS:


型式 Model	吐出能力 Delivery capacity(1800rpm)		壓力調整範圍 Pressure adj. range	額定速度 Rated speed	
	前泵 Front pump	後泵 Rear pump		最高 Max.	最低 Min.
VP-1212	12 l/min	12 l/min	3 ~ 70bar	1800 rpm	800 rpm
VP-1515	15 l/min	15 l/min			
VP-2020	20 l/min	20 l/min			
VP-2323	23 l/min	23 l/min			
VP-2626	26 l/min	26 l/min			
VP-3030	30 l/min	30 l/min			
VP-4040	40 l/min	40 l/min			

尺寸圖/DIMENSIONS:

VP-F1212,F1515,F2020

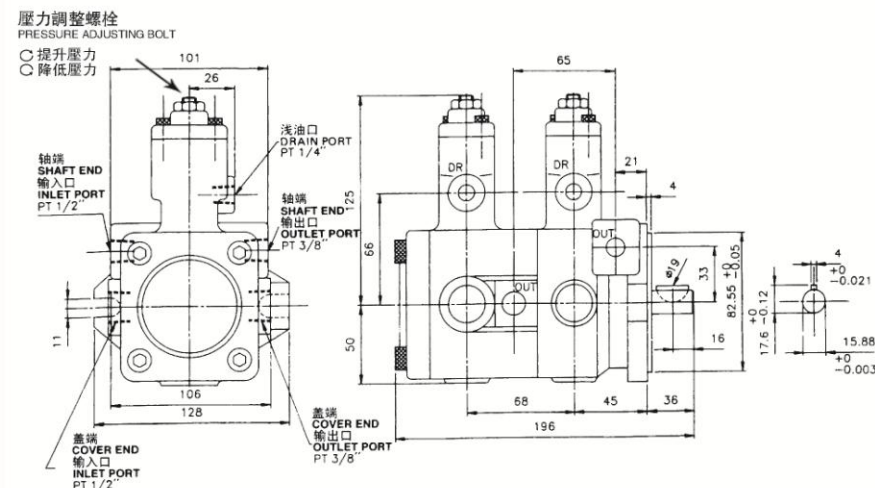

VP-F2323,F2626,F3030,F4040

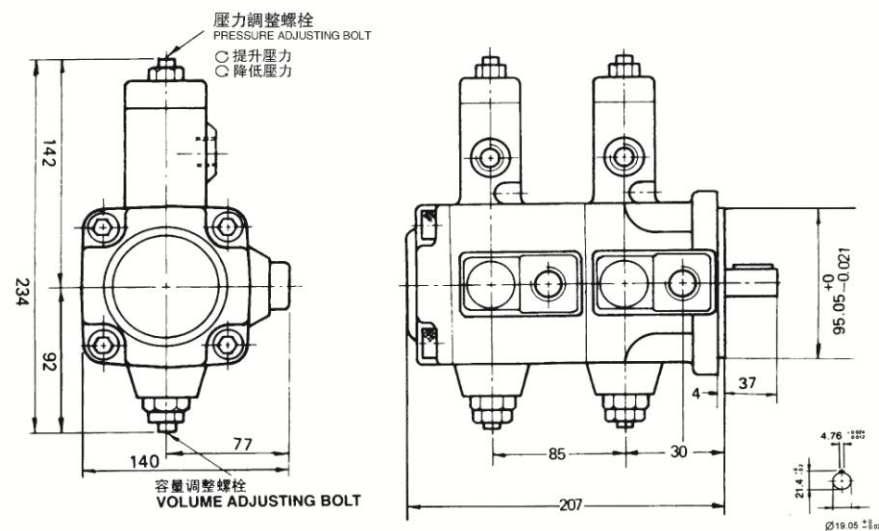




特點:

本系列泵浦，操作時嘈音小，運轉滑順，耐摩耗，
適于工作母機及專用機使用。
溫升小，馬力損失小，內藏式自動壓力補償設計。

FEATURES:

This series pump which being with low noise level,
running smoothly and wear resistant. Especially, those are
very suitable for machine tool & special purpose m/c use.
Little temp upward & little power lose and designed of
auto emerged pressure compensating.


訂購索引/ORDERING INDEX:

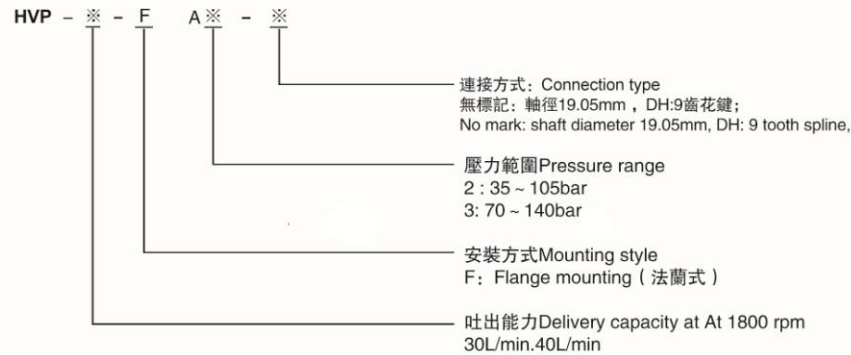

規格/SPECIFICATIONS:





型式 Model	吐出能力 Delivery capacity(1800rpm)	壓力調整範圍 Pressure adj. range	額定速度 Rated speed	
			最高 Max.	最低 Min.
HVP-30	30 L/min	35~140bar	1800 rpm	800 rpm
HVP-40	40 L/min	35~140bar		

尺寸圖/DIMENSIONS: HVP-30、40

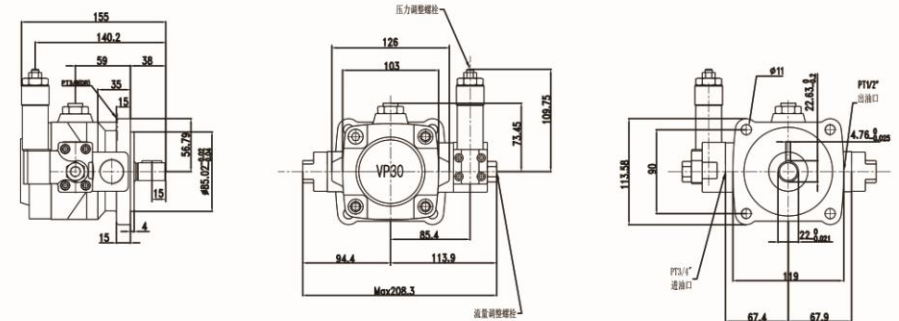

性能曲綫

A壓力-流量-輸入功率特性

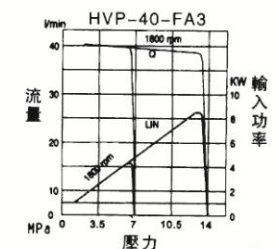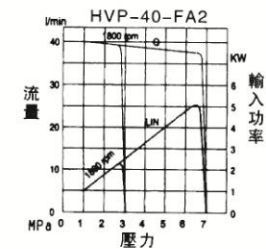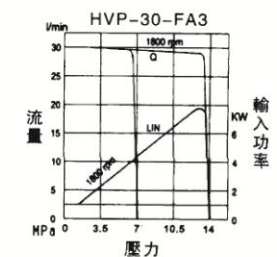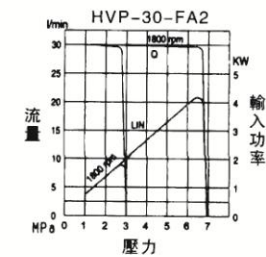



特點:


共用同一心軸及馬達，節省空間，本組合泵因採用一小流量之齒輪泵，而形成一高低壓泵組合。
噪音小、效率高，運轉滑順。

FEATURES:

Employed same shaft & motor, save occupied space, Since, this combination pump is adopted a small flow rate gear pump and formed a hi-low pressure pump set.

Low noise level, hi-efficiency, and running smoothly.


訂購索引/ORDERING INDEX:

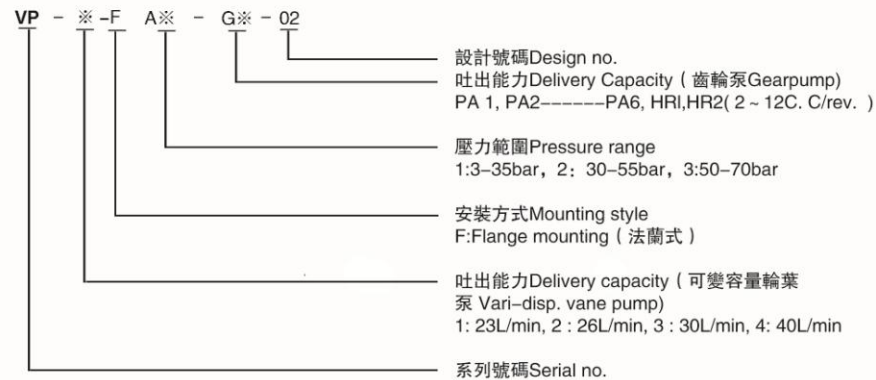


規格/SPECIFICATIONS:

型式 Model	齒輪泵 Gear pump		可變容量 Vari-disp. vane pump		額定速度 Rated speed	
	最大壓力 Max. pres.	吐出能力 Del iv. Cap.	最大壓力 Max. pres.	吐出能力 Del iv. Cap.	最高 Max.	最低 Min.
VP-23-G	210bar	2 ~ 12c. c/rev.	70bar	23L/min	1800 rpm	800 rpm
VP-26-G				26L/min		
VP-30-G				30L/min		
VP-40-G				40L/min		

尺寸圖/DIMENSIONS:

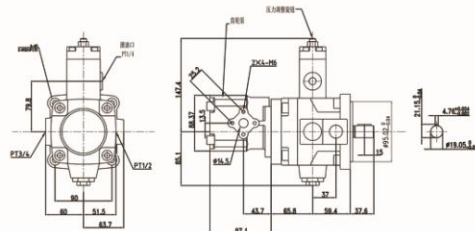

訂購索引/ORDERING INDEX:

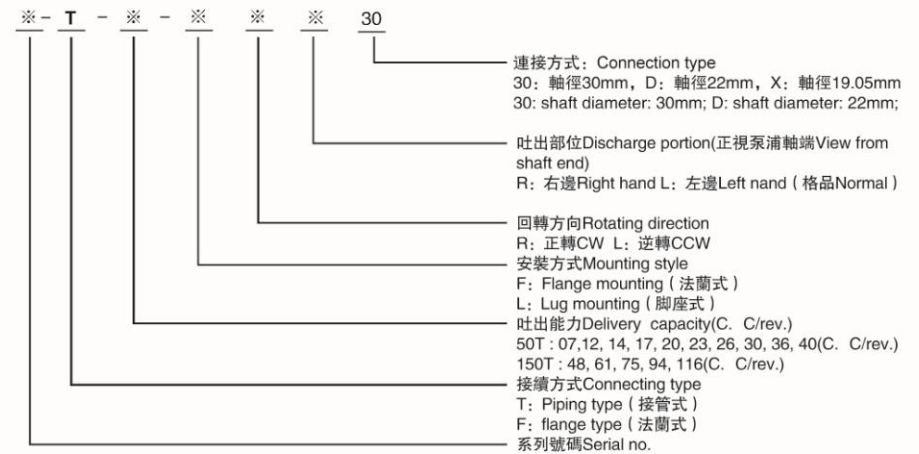

規格/SPECIFICATIONS:

型式 Model	吐出能力 Delivery capacity				最大壓力 Max. pressure(kgf/cm ³)	額定速度 Rated speed	
	回轉速度(rpm)Running speed					最高 Max.	最低 Min.
	1000	1200	1500	1800			
50T-07	—	8.2	10.3	12.5	70	1800	950
50T-12	12	14.4	18.0	21.6		1800	950
50T-14	14.6	17.5	21.7	26.1		1800	950
50T-17	17.0	20.3	25.5	31.5		1800	950
50T-20	20.0	23.8	29.8	36.7		1800	950
50T-23	23	27.6	34.5	41.4		1800	950
50T-26	26.2	31.4	39.3	47.2		1800	950
50T-30	30.1	3.1	45.2	54		1800	950
50T-36	36.2	41.4	54.3	64		1500	950
50T-40	41.5	49.4	62	74.5		1200	950
50T-43	43	51.6	—	—		1500	950
150T-48	48.3	57.9	72.4	86.9	70	1800	900
150T-61	61.5	73.8	92.2	110.7		1800	900
150T-75	75.5	90.6	113.2	135.9		1500	900
150T-94	94.2	113.0	141.3	168		1500	900
150T-116	116.3	139.6	174	—		1200	900