



特點:


共用同一心軸及馬達，節省空間，本組合泵因採用一小流量之齒輪泵，而形成一高低壓泵組合。
噪音小、效率高，運轉滑順。

FEATURES:

Employed same shaft & motor, save occupied space, Since, this combination pump is adopted a small flow rate gear pump and formed a hi-low pressure pump set.

Low noise level, hi-efficiency, and running smoothly.


訂購索引/ORDERING INDEX:

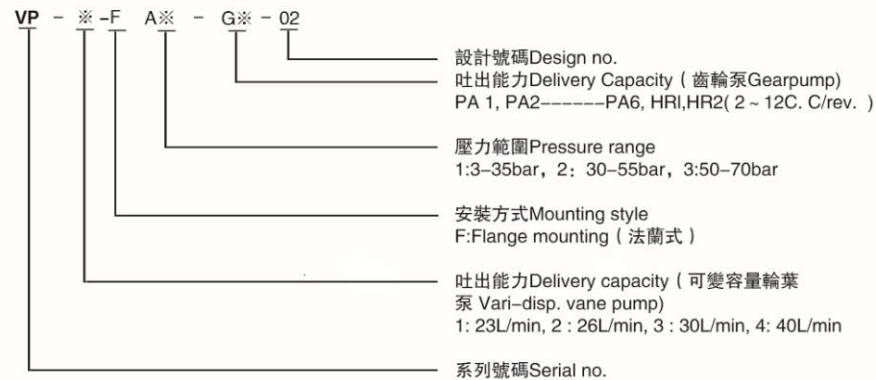


規格/SPECIFICATIONS:

型式 Model	齒輪泵 Gear pump		可變容量 Vari-disp. vane pump		額定速度 Rated speed	
	最大壓力 Max. pres.	吐出能力 Del iv. Cap.	最大壓力 Max. pres.	吐出能力 Del iv. Cap.	最高 Max.	最低 Min.
VP-23-G	210bar	2 ~ 12c. c/rev.	70bar	23L/min	1800 rpm	800 rpm
VP-26-G				26L/min		
VP-30-G				30L/min		
VP-40-G				40L/min		

尺寸圖/DIMENSIONS:

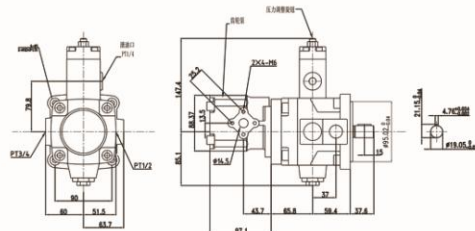

訂購索引/ORDERING INDEX:

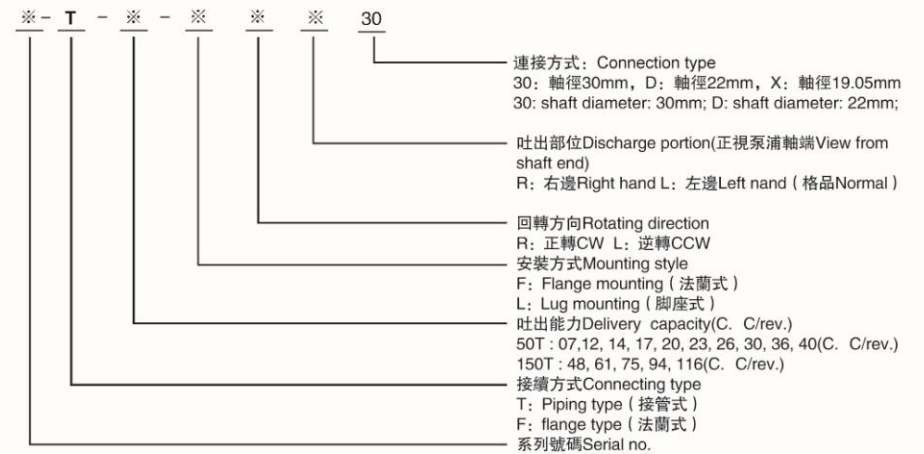


規格/SPECIFICATIONS:


型式 Model	吐出能力 Delivery capacity				最大壓力 Max. pressure(kgf/cm ²)	額定速度 Rated speed	
	回轉速度(rpm)Running speed					最高 Max.	最低 Min.
	1000	1200	1500	1800			
50T-07	—	8.2	10.3	12.5	70	1800	950
50T-12	12	14.4	18.0	21.6		1800	950
50T-14	14.6	17.5	21.7	26.1		1800	950
50T-17	17.0	20.3	25.5	31.5		1800	950
50T-20	20.0	23.8	29.8	36.7		1800	950
50T-23	23	27.6	34.5	41.4		1800	950
50T-26	26.2	31.4	39.3	47.2		1800	950
50T-30	30.1	3.1	45.2	54		1800	950
50T-36	36.2	41.4	54.3	64		1500	950
50T-40	41.5	49.4	62	74.5		1200	950
50T-43	43	51.6	—	—	1500	950	
150T-48	48.3	57.9	72.4	86.9	70	1800	900
150T-61	61.5	73.8	92.2	110.7		1800	900
150T-75	75.5	90.6	113.2	135.9		1500	900
150T-94	94.2	113.0	141.3	168		1500	900
150T-116	116.3	139.6	174	—		1200	900

尺寸圖/DIMENSIONS:

50T 法兰式 Flange Type

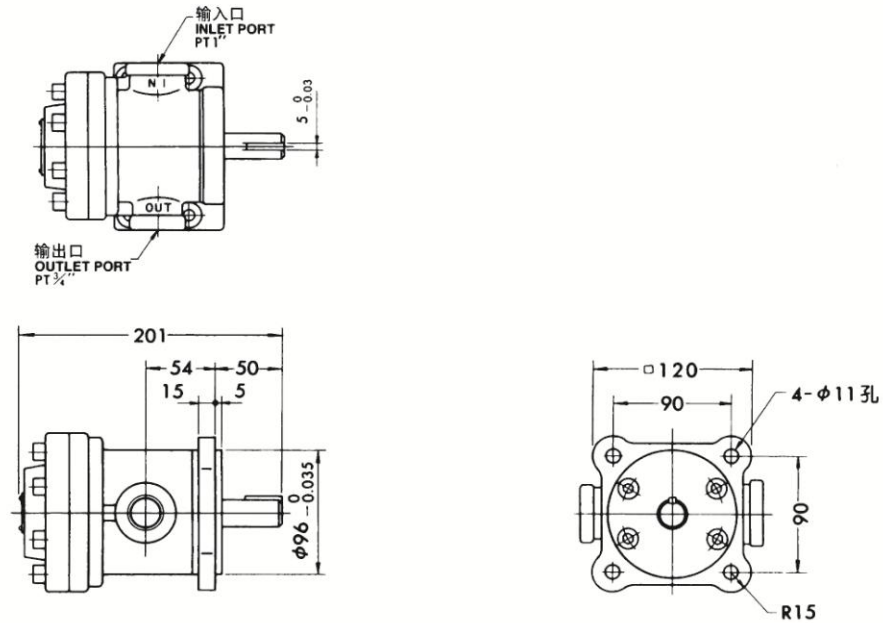


50T 脚座式 Lug Type

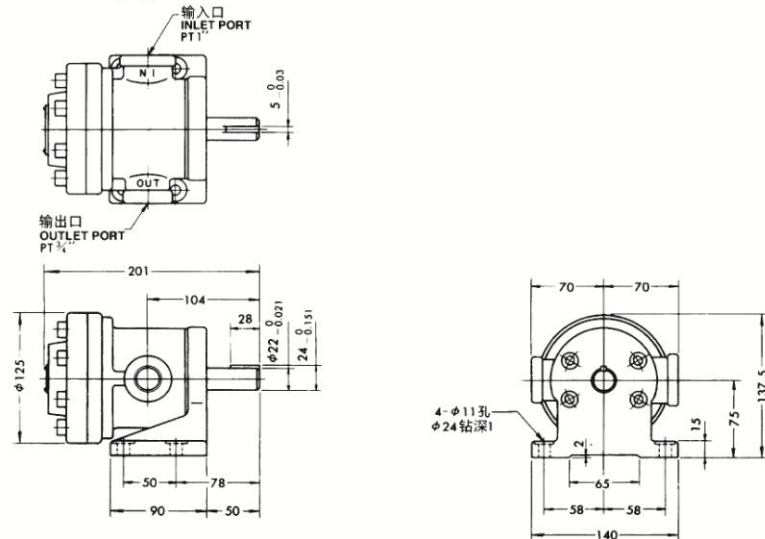


尺寸圖/DIMENSIONS:

150T 法兰式 Flange Type

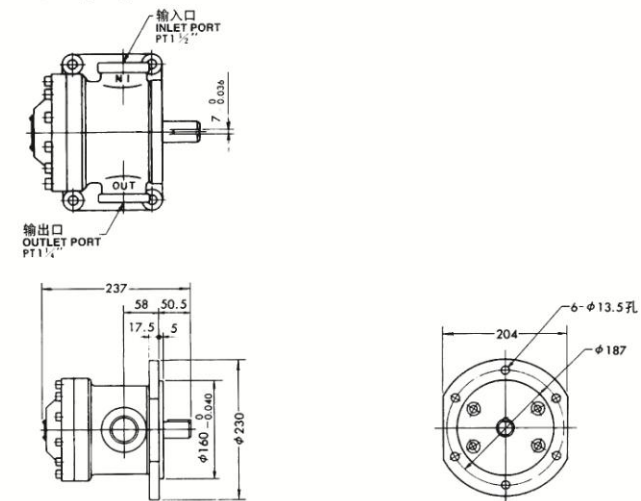

150T 脚座式 Lug Type

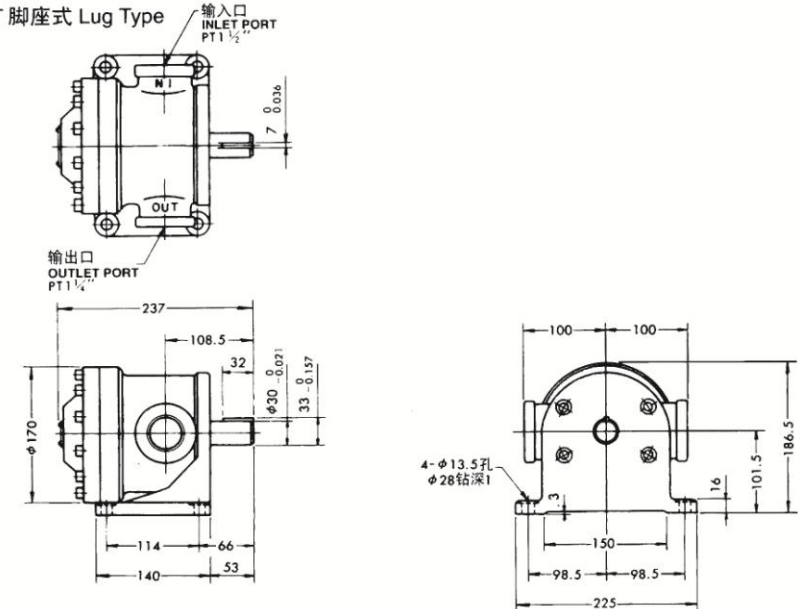



特點:

共用同一心軸及馬達，節省空間。
阻抗低之吸入口設計，運轉滑順，穩定性高，噪音小。

備有正逆轉及軸徑22mm供客戶選擇（一般軸徑為19mm。）

FEATURES:

Employed same shaft & motor, occupied little space.

Designed of suction orifice for low suction resistance runningsmoothly, hi-stability & low noise level.

Equipped with forward-reverse rotating and 22 mm shaftdia, etc., for customer to select (In general, shaft dia 19mm).

訂購索引/ORDERING INDEX:

150 FF-※-※-※※-02


設計號碼Design no.
吐出部位Discharge portion(正視泵浦軸端
View from shaft end)
R: 右邊Right hand L: 左邊Left hand (規格品
Normal)
回轉方向Rotating direction
R: 正轉CW L: 逆轉CCW
安裝方式Mounting style
F: Flange mounting (法蘭式)
L: Lug mounting (腳座式)
吐出能力Delivery capacity(葉端Cover end)
150T: 48, 61, 75, 94, 116 (C. C/rev.)
吐出能力Delivery capacity(軸端Shaft end)
150T: 48, 61, 75, 94, 116 (C. C/rev.)
接續方式Connecting type
T: Piping type (接管式)
F: flange type (法蘭式)
系列號碼Serial no.

規格/SPECIFICATIONS:


型式 Model	吐出能力 Delivery capacity				最大壓力 Max. pressure (kgf/cm ²)1000	額定速度 Rated speed	
	回轉速度(rpm)Running speed					最高 Max.	最低 Min.
	1000	1200	1500	1800			
150T-48	48.3	57.9	72.4	86.9	90	1800	900
150T-61	61.5	73.8	92.2	110.0	90	1800	
150T-75	75.5	90.6	113.2	135.9	90	1500	
150T-94	94.2	113.0	141.3	—	70	1500	
150T-116	116.3	139.6	—	—	70	1200	
150T-48	48.3	57.9	72.4	86.9	90	1800	
150T-61	61.5	73.8	92.2	110.7	90	1800	
150T-75	75.5	90.6	113.2	135.9	90	1500	
150T-94	94.2	113.0	141.3	—	70	1500	
150T-116	116.3	139.6	—	—	70	1200	

尺寸圖/DIMENSIONS:

150F + 150F 法蘭式 Flange Type

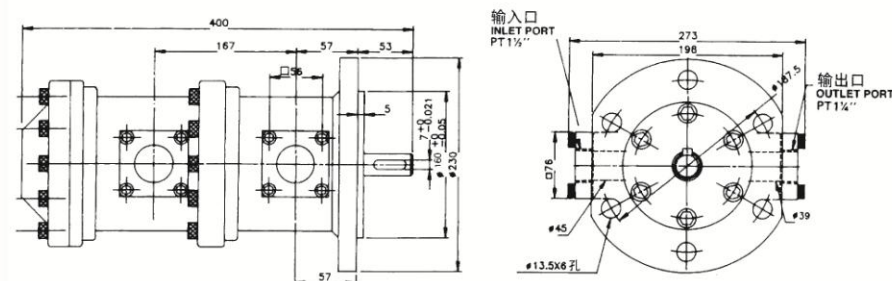

150F + 150F 腳座式 Lug Type

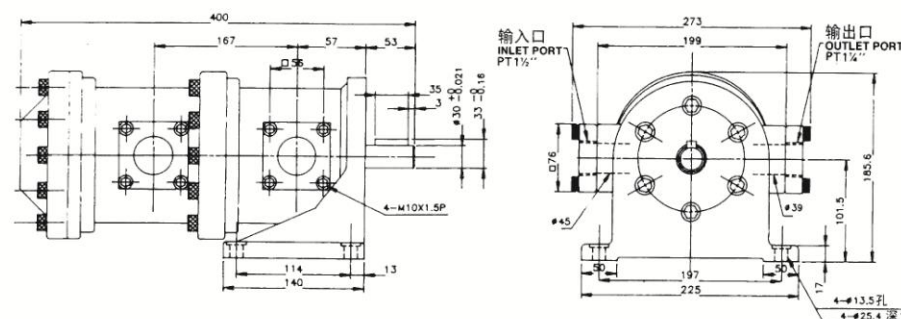



訂購索引/ORDERING INDEX:


※	T	※	※	※	※	G	※	30
連接方式: Connection type 30: 軸徑30mm, D: 軸徑22mm, X: 軸徑19.05mm 30: shaft diameter: 30mm; D: shaft diameter: 22mm; X: shaft diameter: 19.05mm 吐出能力Delivery cap. (齒輪泵Gear pump) PA1, PA2, PA3-----PB2, PB3, PB4, PB5 (1、19c. c/rev.) 吐出部位Discharge portion(正視泵浦軸端View from shaft end) R: 右邊Right thand L: 左邊Left hand (規格品Normal) 回轉方向Rotating direction R: 正轉CW L: 逆轉CCW 安裝方式Mounting style F: Flange mounting (法蘭式) L: Lug mounting (腳座式) 吐出能力Delivery capacity(軸端Shaft end) 50T, 07, 12, 14, 17, 20, 23, 26, 30, 36, 40, 43, C. C/rev.) 150T: 48, 61, 75, 94, 116 (C. C/rev.) 接續方式Connecting type T: Piping type (接管式) F: flange type (法蘭式) 系列號碼Serial no.								

規格/SPECIFICATIONS:


型式 Model	齒輪泵 Gear pump		輪葉泵 Vane pump		額定速度 Rated speed	
	最大壓力 Max. pres.	吐出能力 Del iv. Cap.	最大壓力 Max. pres.	吐出能力 Del iv. Cap.	最高 Max.	最低 Min.
50T-07	3000psi	1 ~ 12 C. C/rev.	1000psi	07 C. C/rev.	1800rpm	900rpm
50T-12				12 C. C/rev.		
50T-14				14 C. C/rev.		
50T-17				17 C. C/rev.		
50T-20				20 C. C/rev.		
50T-23				23 C. C/rev.		
50T-26				26 C. C/rev.		
50T-30				30 C. C/rev.		
50T-36				36 C. C/rev.		
50T-40				40 C. C/rev.		
50T-43				43 C. C/rev.		
150T-48				48 C. C/rev.		
150T-61				61 C. C/rev.		
150T-75				75 C. C/rev.		
150T-94				94 C. C/rev.		
150T-116				116 C. C/rev.		

尺寸圖/DIMENSIONS:


50T + PA 法蘭式 Flange Type

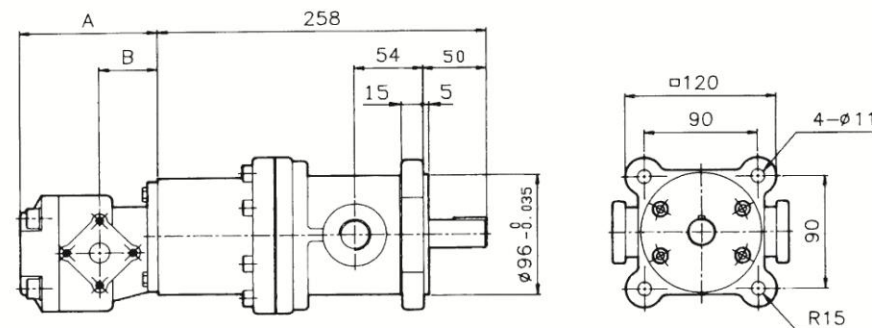


50T + PA 腳座式 Lug Type

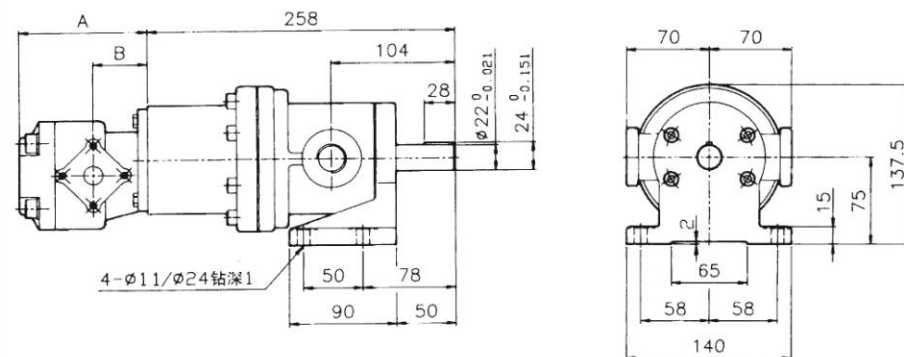

150T + PA

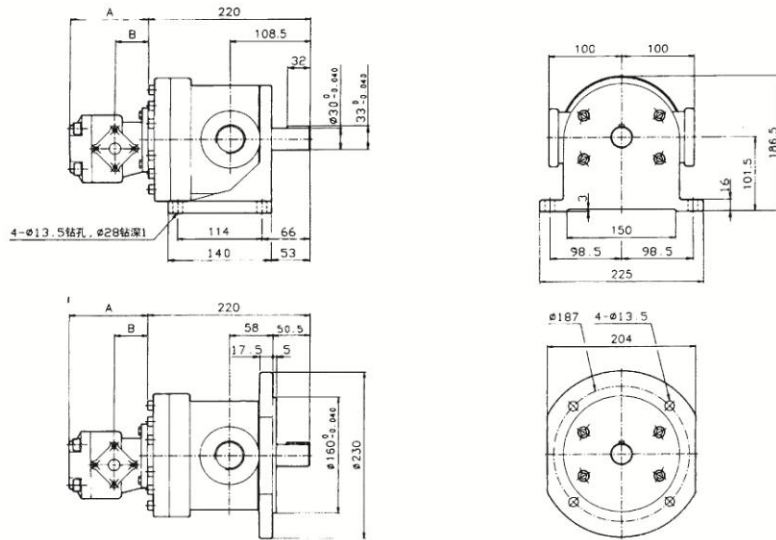

150T + PB

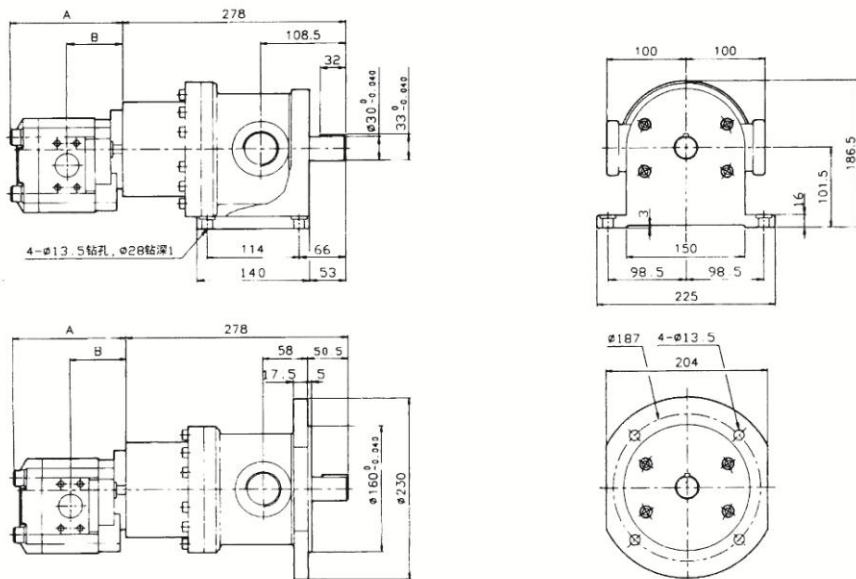


特點:

共用同一心軸，同一馬達而構成高低壓泵。
噪音小，流量大，低成本，高容積效率設計。

FEATURES:

Employed same shaft & motor and formed a hi-low pressure pump set.
Low noise level, large flow rate, low cost & hi-volumetric efficiency design.


訂購索引/ORDERING INDEX:

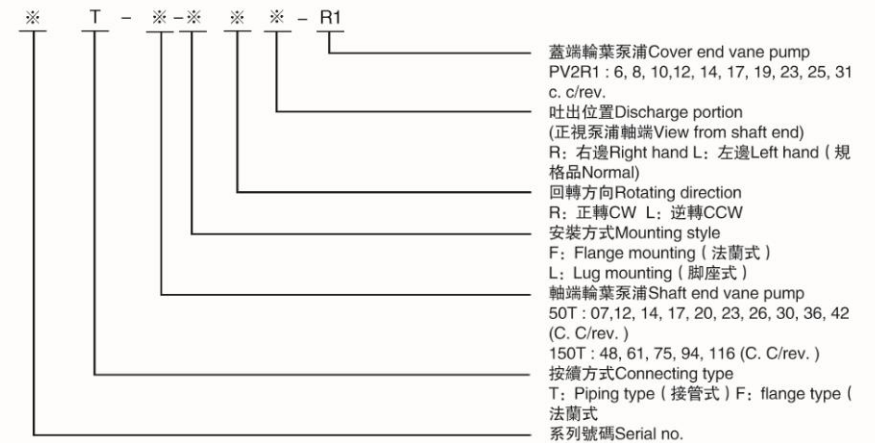


規格/SPECIFICATIONS:

型式 Model	吐出能力 Delivery capacity				最大壓力 Max. pressure(kgf/cm ²)	額定速度 Rated speed	
	回轉速度(rpm)Running speed					最高 Max.	最低 Min.
	1000	1200	1500	1800			
150T-48	48.3	57.96	72.4	86.9	90	1800	900
150T-61	61.5	73.8	92.2	110.7	90	1800	900
150T-75	75.5	90.6	113.2	135.9	90	1500	900
150T-94	94.2	113.0	141.3	169	70	1500	900
150T-116	116.3	139.6	174	—	70	1200	900
PV2R1-6	6.2	7.4	9.3	11.2	210	1800	1200
PV2R1-8	8.1	9.7	12.1	14.6	245	1800	950
PV2R1-10	10.1	12.1	15.1	18.9	245	1800	950
PV2R1-12	12.2	14.6	18.3	21.9	245	1800	950
PV2R1-14	14.3	17.1	21.5	25.7	245	1800	950
PV2R1-17	17.1	20.5	25.6	30.7	245	1800	950
PV2R1-19	19.2	23.0	28.8	34.5	245	1800	950
PV2R1-23	23.3	27.9	34.9	41.9	245	1800	950
PV2R1-25	26.1	31.3	39.1	46.9	245	1800	950
PV2R1-31	31.1	37.3	46.6	55.8	245	1500	950

50T + PV2R1

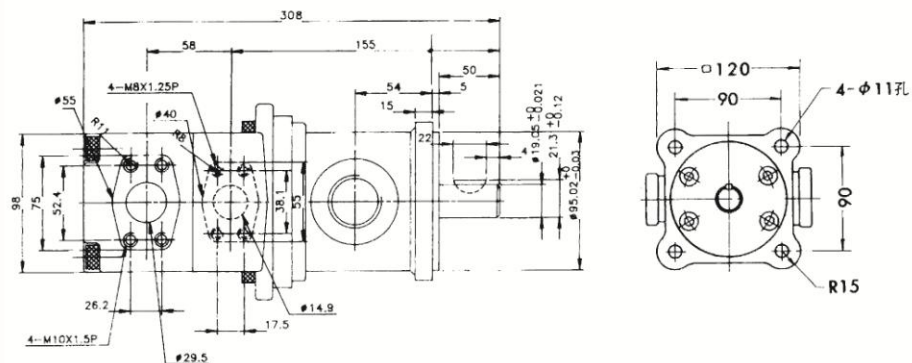

150T + PV2R1

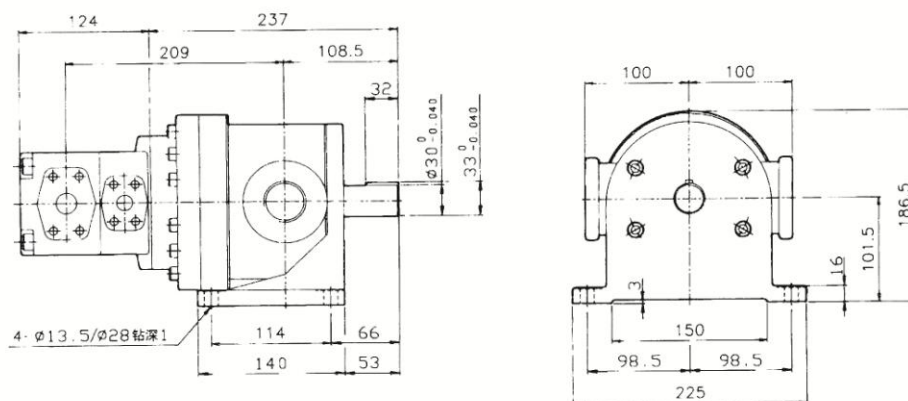

訂購索引/ORDERING INDEX:

PV2R1 - ※ - ※ - ※ ※ :


— 系列號碼Serial no.

規格/SPECIFICATIONS:


型式 Model	吐出能力 Delivery capacity				最大壓力 Max. pressure(kgf/cm ²)	額定速度 Rated speed	
	回轉速度(rpm)Running speed					最高 Max.	最低 Min.
	1000	1200	1500	1800			
PV2R1-06	6.2	7.4	9.3	11.2	210	1800	1200
PV2R1-08	8.1	9.4	12.1	14.6	210	1800	950
PV2R1-10	10.1	12.1	15.1	18.9	245	1800	950
PV2R1-12	12.2	14.6	18.3	21.9	245	1800	950
PV2R1-14	13.6	17.1	21.5	25.7	245	1800	950
PV2R1-17	16.6	20.5	25.6	0.7	245	1800	950
PV2R1-19	18.6	23.0	28.8	34.5	245	1800	950
PV2R1-23	22.7	27.9	34.9	41.9	245	1800	950
PV2R1-25	25.3	31.3	39.1	46.9	245	1800	950
PV2R1-31	31.0	37.3	46.6	-----	245	1500	950
PV2R2-26	26.2	31.4	39.3	47.1	245	1800	950
PV2R2-33	33.0	38.5	48.1	57.7	245	1800	950
PV2R2-38	38.2	45.8	57.3	68.7	245	1800	950
PV2R2-41	41.3	49.2	61.5	73.8	210	1800	950
PV2R2-47	47.2	57.8	71.4	86.7	245	1800	950
PV2R2-53	53.1	63.7	79.6	95.5	245	1800	950
PV2R2-59	60.2	72.7	90.3	108.3	210	1800	950
PV2R2-65	65.3	78.3	97.9	117.5	210	1800	950
PV2R3-60	60.3	72.3	90.4	108.5	210	1800	900
PV2R3-66	66.4	79.6	99.6	119.5	210	1800	900
PV2R3-76	76.3	91.5	114.4	137.3	210	1800	900
PV2R3-85	84.5	101.4	126.7	152.1	210	1800	900
PV2R3-88	88.3	105.9	132.4	158.9	210	1800	900
PV2R3-94	93.6	113.4	141.7	170.1	210	1800	900
PV2R3-108	108.2	129.8	162.3	194.4	210	1800	900
PV2R3-116	115.6	139.3	174.1	208.9	175	1800	900
PV2R3-126	125.6	149.5	186.9	226	175	1500	900

尺寸圖/DIMENSIONS:


PV2R1

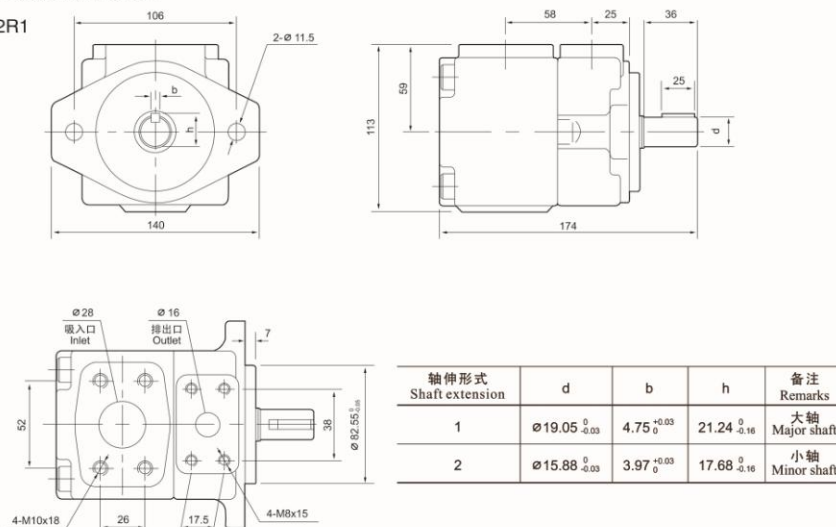

尺寸圖/DIMENSIONS:

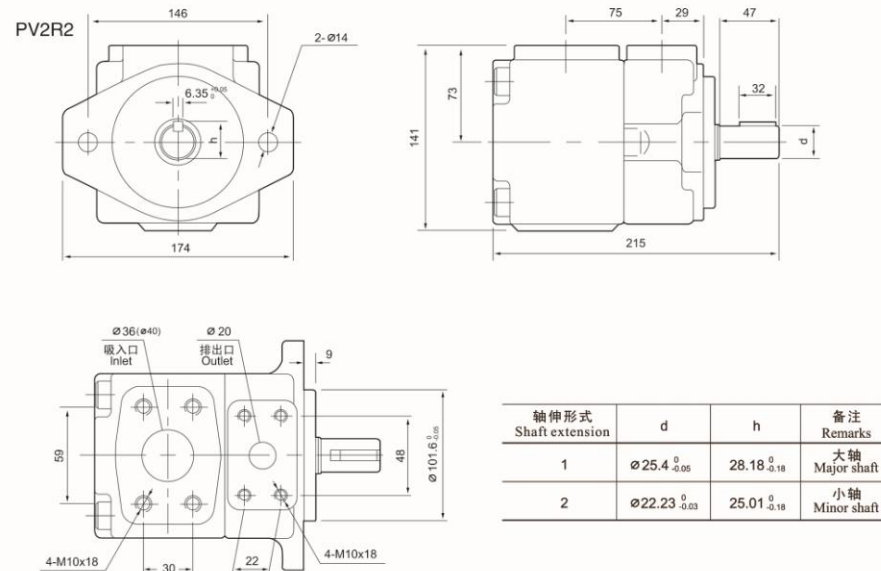

PV2R3

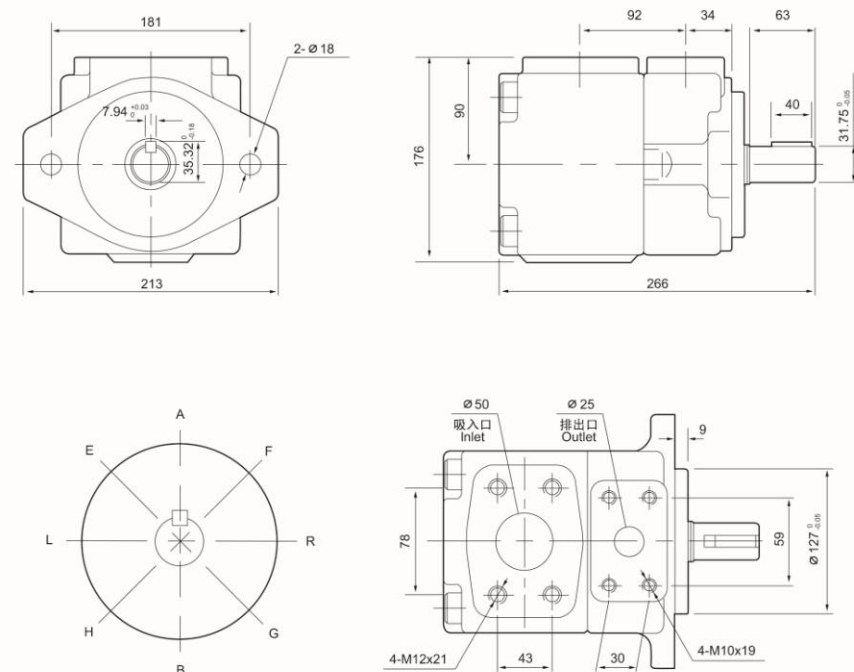




訂購索引/ORDERING INDEX:


PV2R12 - ※ - ※ - ※ - ※ - ※ - 02	設計號碼Design no.
※	吐出位置(2R2) Discharge portion (正視泵浦軸端View from shaft end) A: 向上Upward (規格品normal) B: 向下Downward R: 右邊Right side L: 左邊Left side
※	吸入位置Suction portion (正視泵浦軸端View from shaft end) A: 向上Upward (規格品normal) B: 向下Downward R: 右邊Right side L: 左邊Left side
※	吐出位置(2R1) Discharge portion (正視泵浦軸端View from shaft end) A: 向上Upward (規格品normal) B: 向下Downward R: 右邊Right side L: 左邊Left side
※	回轉方向Rotating direction R: 正轉CW L: 逆轉CCW
※	吐出能力 Deliv. Cap. (蓋端verend) PV2R1, PV2R2 6, 8, 10, 12, 14, 17, 19, 23, 25, 31 26, 33, 38, 41, 47, 53, 59, 65, c. c/rev.
※	吐出能力 Deliv. Cap. (軸端Shaftend) PV2R2, PV2R3 26, 33, 38, 41, 47, 53, 59, 65, 60, 66, 76, 85, 88, 94, 108, 116, 126 c. c/rev.
※	安裝方式Mounting style F: Flange mounting (法蘭式) L: Lug mounting (腳座式)
※	系列號碼Serial no.

尺寸圖/DIMENSIONS:

PV2R12

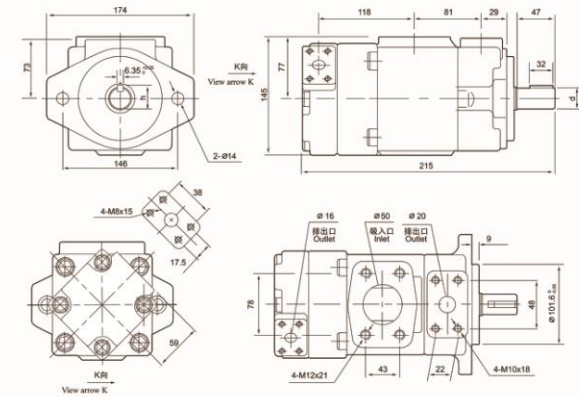

PV2R13

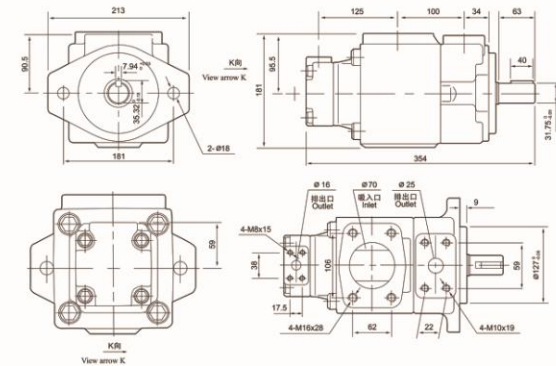

PV2R23

